


SYSTEM Classic

The Classic system features harmonious design and rounded lines, and belongs to the tradition of classic doors and windows. Thanks to the broad range of profiles, this system can meet all construction requirements. In the Classic system, the series of accessories and gaskets allow to avoid using screws in the assembly of aluminum frames on wood. This is a time saving solution that prevents all possibilities of error in positioning clips.



Classic system
harmonious design and rounded lines

frame: 68X70
sash: 68X81

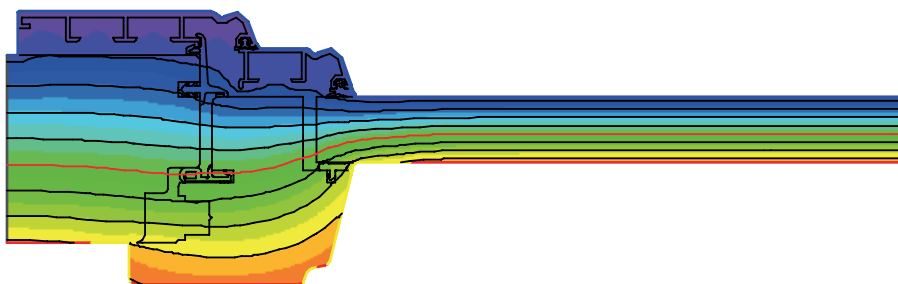

Soft Wood

$U_f = 1,4 \text{ W/m}^2\text{K}$

Hard Wood

$U_f = 1,6 \text{ W/m}^2\text{K}$

	U_f	U_g	$\psi_g \text{ 0,04}$	$\psi_g \text{ 0,06}$
triple glazing	1,4 W/(m ² K)	0,6	$U_w=1,0 \text{ W/(m}^2\text{K)}$	$U_w=1,0 \text{ W/(m}^2\text{K)}$
	1,4 W/(m ² K)	0,7	$U_w=1,0 \text{ W/(m}^2\text{K)}$	$U_w=1,1 \text{ W/(m}^2\text{K)}$
	1,4 W/(m ² K)	0,8	$U_w=1,1 \text{ W/(m}^2\text{K)}$	$U_w=1,1 \text{ W/(m}^2\text{K)}$
	1,4 W/(m ² K)	0,9	$U_w=1,2 \text{ W/(m}^2\text{K)}$	$U_w=1,2 \text{ W/(m}^2\text{K)}$
	1,4 W/(m ² K)	1	$U_w=1,2 \text{ W/(m}^2\text{K)}$	$U_w=1,3 \text{ W/(m}^2\text{K)}$
double glazing	1,4 W/(m ² K)	1,1	$U_w=1,3 \text{ W/(m}^2\text{K)}$	$U_w=1,3 \text{ W/(m}^2\text{K)}$
	1,4 W/(m ² K)	1,2	$U_w=1,4 \text{ W/(m}^2\text{K)}$	$U_w=1,4 \text{ W/(m}^2\text{K)}$
	1,4 W/(m ² K)	1,3	$U_w=1,4 \text{ W/(m}^2\text{K)}$	$U_w=1,5 \text{ W/(m}^2\text{K)}$
	1,4 W/(m ² K)	1,4	$U_w=1,5 \text{ W/(m}^2\text{K)}$	$U_w=1,5 \text{ W/(m}^2\text{K)}$
	1,4 W/(m ² K)	1,5	$U_w=1,6 \text{ W/(m}^2\text{K)}$	$U_w=1,6 \text{ W/(m}^2\text{K)}$
	1,4 W/(m ² K)	1,6	$U_w=1,6 \text{ W/(m}^2\text{K)}$	$U_w=1,7 \text{ W/(m}^2\text{K)}$
	1,4 W/(m ² K)	1,7	$U_w=1,7 \text{ W/(m}^2\text{K)}$	$U_w=1,7 \text{ W/(m}^2\text{K)}$
	1,4 W/(m ² K)	1,8	$U_w=1,8 \text{ W/(m}^2\text{K)}$	$U_w=1,8 \text{ W/(m}^2\text{K)}$

	U_f	U_g	$\psi_g \text{ 0,04}$	$\psi_g \text{ 0,06}$
triple glazing	1,6 W/(m ² K)	0,6	$U_w=1,0 \text{ W/(m}^2\text{K)}$	$U_w=1,1 \text{ W/(m}^2\text{K)}$
	1,6 W/(m ² K)	0,7	$U_w=1,1 \text{ W/(m}^2\text{K)}$	$U_w=1,1 \text{ W/(m}^2\text{K)}$
	1,6 W/(m ² K)	0,8	$U_w=1,2 \text{ W/(m}^2\text{K)}$	$U_w=1,2 \text{ W/(m}^2\text{K)}$
	1,6 W/(m ² K)	0,9	$U_w=1,2 \text{ W/(m}^2\text{K)}$	$U_w=1,3 \text{ W/(m}^2\text{K)}$
	1,6 W/(m ² K)	1	$U_w=1,3 \text{ W/(m}^2\text{K)}$	$U_w=1,3 \text{ W/(m}^2\text{K)}$
double glazing	1,6 W/(m ² K)	1,1	$U_w=1,4 \text{ W/(m}^2\text{K)}$	$U_w=1,4 \text{ W/(m}^2\text{K)}$
	1,6 W/(m ² K)	1,2	$U_w=1,4 \text{ W/(m}^2\text{K)}$	$U_w=1,5 \text{ W/(m}^2\text{K)}$
	1,6 W/(m ² K)	1,3	$U_w=1,5 \text{ W/(m}^2\text{K)}$	$U_w=1,5 \text{ W/(m}^2\text{K)}$
	1,6 W/(m ² K)	1,4	$U_w=1,6 \text{ W/(m}^2\text{K)}$	$U_w=1,6 \text{ W/(m}^2\text{K)}$
	1,6 W/(m ² K)	1,5	$U_w=1,6 \text{ W/(m}^2\text{K)}$	$U_w=1,7 \text{ W/(m}^2\text{K)}$
	1,6 W/(m ² K)	1,6	$U_w=1,7 \text{ W/(m}^2\text{K)}$	$U_w=1,7 \text{ W/(m}^2\text{K)}$
	1,6 W/(m ² K)	1,7	$U_w=1,8 \text{ W/(m}^2\text{K)}$	$U_w=1,8 \text{ W/(m}^2\text{K)}$
	1,6 W/(m ² K)	1,8	$U_w=1,8 \text{ W/(m}^2\text{K)}$	$U_w=1,9 \text{ W/(m}^2\text{K)}$

NOTES: Calculation made according to UNI EN 10077-2:2004 and UNI EN 10077-1:2007 standards.

Sample dimensions as required by UNI EN ISO 12567-1:2002 (Window with 1 sash LxH:1230x1480mm).

It is calculated on standard systems with reference to the sections shown in the Uniform technical catalogue.

This calculation was made on the basis of the standards provided below only for the purpose of internal analysis and verification.

The results obtained do not constitute compliance criterion. Such results can be issued only by an authorized certification body.

Uniform SpA shall not be held liable for either the values indicated or their use.

Uniform SpA reserves the right to introduce modifications at any time without notice.

Reference Standards: UNI EN 10077-1:2007; UNI EN 10077-2:2004; UNI EN 12524:2001; UNI EN 673:2011.