

general catalog
BLINDS and SHUTTERS





PROGRESS IS CONSTANTLY EXPLORING NEW SOLUTIONS

This belief has always guided us in our mission of creating highly innovative and technologically advanced systems for windows-doors.

From its foundation in 1988, operating with constant commitment and increasing the range of products, Uniform has reached the position of Leader in Europe.

As of today the company extends over 25.000 m² of built area, has 200 employees in the Italian headquarter and around 300 employees in total worldwide.

UNIFORM

The force of a sector group leader

INDEX

TECHNOLOGIES AND FINISHINGS

- 3 establishments worldwide
- 4 welding
- 7 the painting plant
- 8 the colours

SHUTTERS AND BLINDS

- 10 moveable shutter
- 12 shutter with fixed louvre
- 14 historic shutter
- 16 blind with slats and shingles
- 18 blind with vertical slats
- 20 blind with vertical slats
- 22 rustic blind
- 24 insulated textured blind
- 26 insulated textured blind and moveable lamellas
- 28 blind with vertical slats measuring 25 mm with "padovana" opening
- 30 blind with vertical slats measuring 25 mm with "vicentina" opening



WELDING TECHNOLOGY

Blinds and shutters in aluminium with welded corners.

The welding technology developed by Uniform to create the frames to couple to the wood aluminium has now been extended to the production of blinds and shutters. The strength of the welded structure allows perfect resilience of the frames through time. Painting performed after welding assures corners that are completely protected by the paint and improved appearance of the finished product.

THE FINISHING


A large and modern painting plant realised within our establishments can ensure quality and quick service. The QUALICOAT mark of quality along with the chromium-free treatment guarantee long duration through time. As well a traditional RAL colours, Uniform has developed a wide range of matt colours, which give the profiles the aspect of varnished wood. Different wood decoration finishes are also available.

THE MATERIAL

Thanks to its high resistance to atmospheric agents, aluminium is the ideal material for the creation of blinds and shutters. Complete exposure to all atmospheric agents (ultraviolet rays, heat, cold, smog, humidity, dust etc.) in fact makes the doors-windows more invulnerable.

RESPECT FOR THE ENVIRONMENT

As well as ISO 9001 certification, Uniform has also obtained ISO 14001 environment certification. The low energy necessary for the production of profiles, the possibility to be entirely re-cycled, the re-use of working trimmings in the production cycle makes aluminium the ideal material regarding environmental respect.

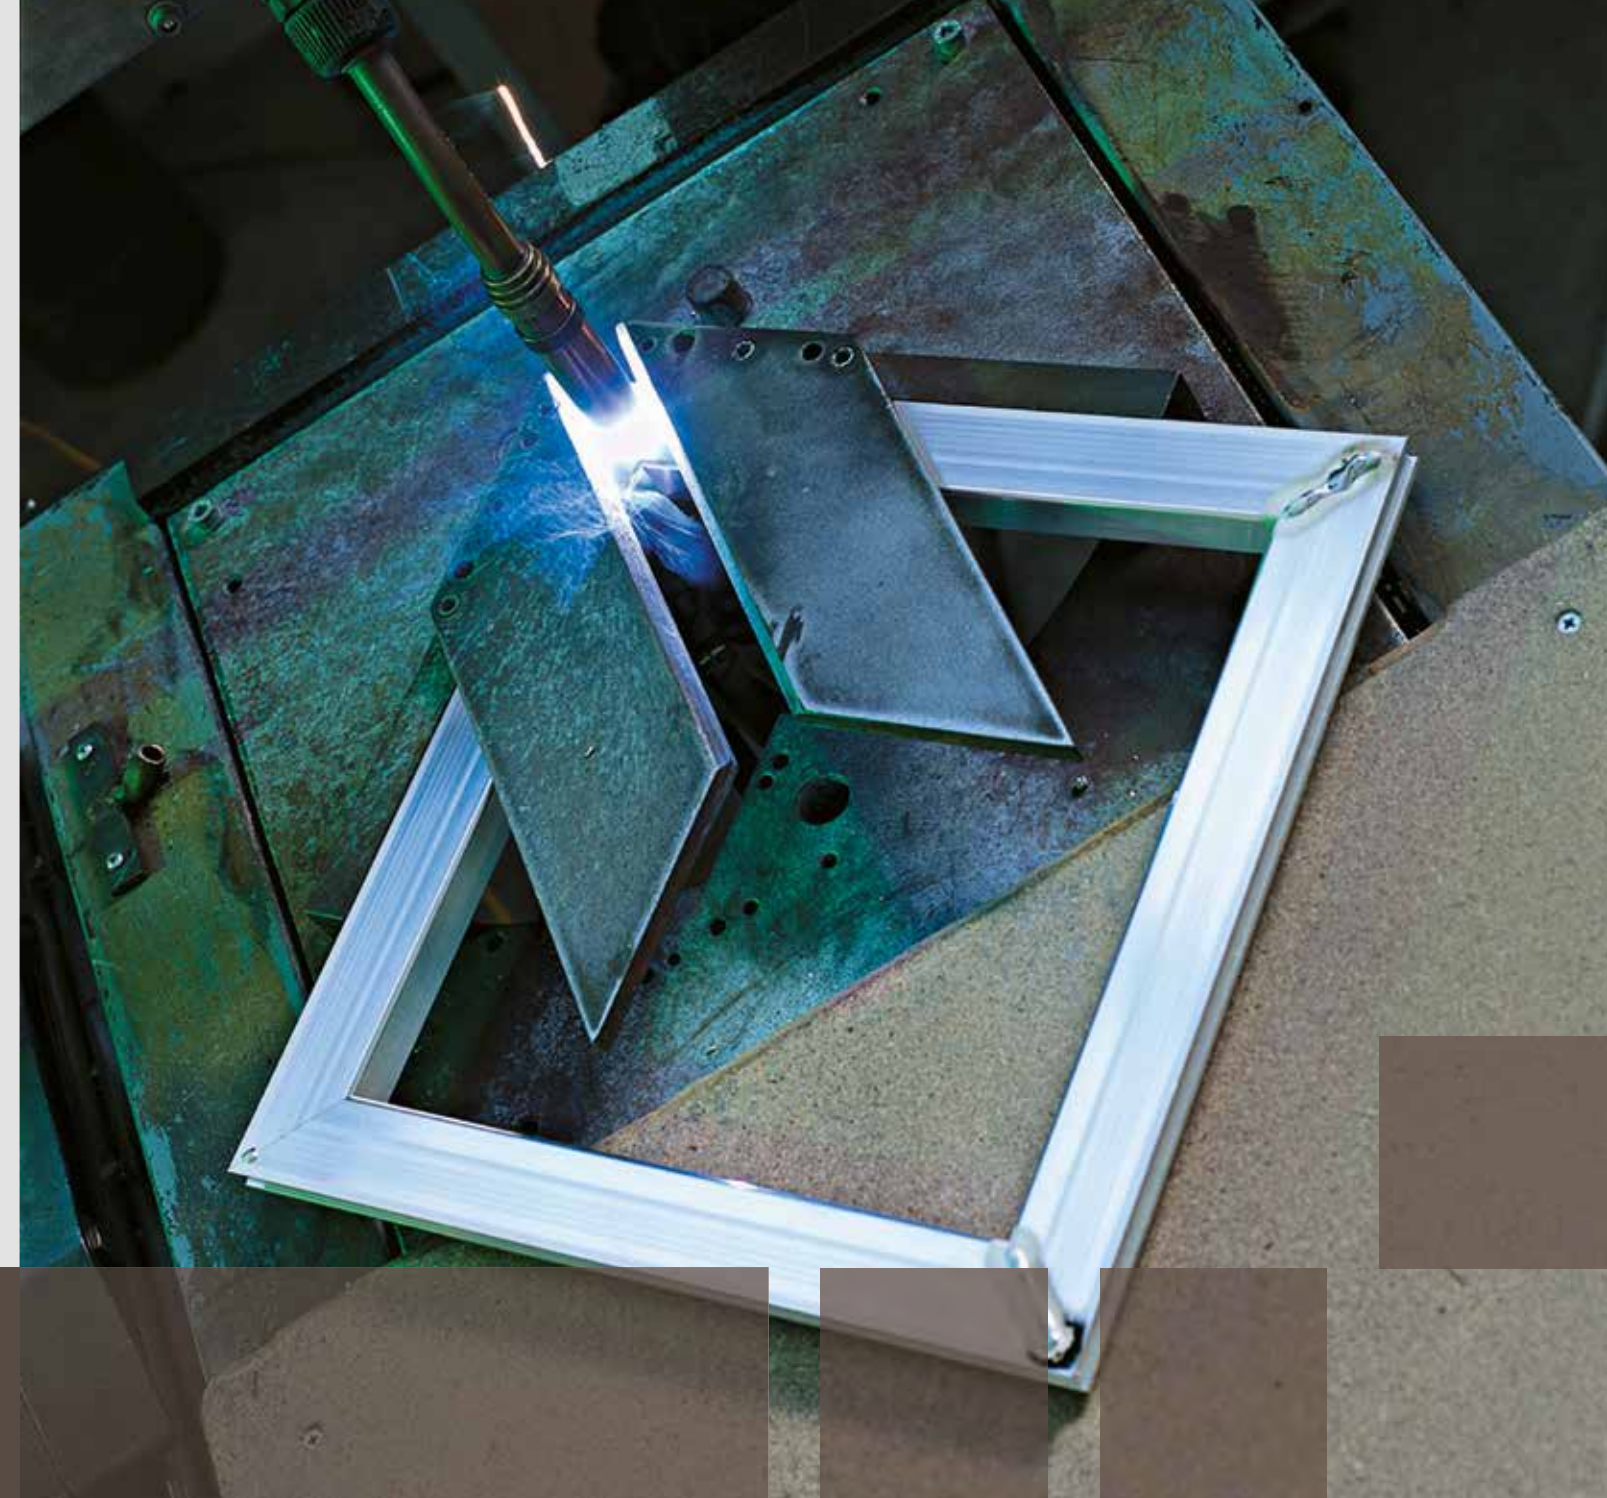

Shutters with welded and painted corners: **STRONG, RESILIENT AND PROTECTED!**

THE TYPES THAT CAN BE CREATED

WITH THICKNESS OF 45 mm AND 31 mm

HISTORIC SHUTTER

45 mm aluminium shutter with welded corners and rhomboidal lamellas measuring 14x35 mm. Spacing distance 40 mm.

MOVEABLE SHUTTER

45 mm aluminium shutter with welded corners, 31 mm with mechanically assembled corners and moveable drop-shaped lamellas measuring 55 mm.

SHUTTER WITH BLIND FIXED LAMELLAS

45 mm aluminium shutter with welded corners, 31 mm with mechanically assembled corners and blind drop-shaped lamellas measuring 55 mm.

SHUTTER WITH SPACED FIXED LOUVRES

45 mm aluminium shutter with welded corners, 31 mm with mechanically assembled corners and fixed louvre lamellas measuring 10x50 mm. Spacing distance 40 mm.

BLINDS WITH SLATS AND SHINGLES

45 mm aluminium blind, with vertical slats coupled to horizontal "shingles", totally insulated internally.

BLIND WITH VERTICAL SLATS

45 mm aluminium blind, with vertical slats on both sides, with total internal insulation.

RUSTIC BLIND

45 mm aluminium shutter, 31 mm with mechanically assembled corners and external vertical slats with central reinforcement piece in the inner part.

BLIND WITH BEVELLED EDGE PANELS

45 mm aluminium shutter with welded corners, 31 mm with mechanically assembled corners, the sashes are enhanced by insulated bevelled edge panels.

BLIND WITH BEVELLED EDGE PANELS MOVEABLE LAMELLAS

45 mm aluminium shutter with welded corners, 31 mm with mechanically assembled corners, the sashes can be realised with insulated bevelled edge panels and drop-shaped moveable lamellas measuring 55 mm.

WITH THICKNESS OF 25 mm

BLIND WITH VERTICAL SLATS

25 mm aluminium blind, with internal self-load bearing ventilated vertical slats. The width of the sashes is composed using profiles available in different sections.







The PAINTING plant

The powder painting plant has been designed to automatically paint bars and frames with maximum dimension of 2.5 mt x 6.0 mt. Pre-treatment is carried out in tanks with a chromium-free system, which guarantees longer duration than traditional systems. The plant has double chamber with rapid colour change in order to guarantee maximum flexibility of the service.




PAINTING

performed with thermosetting polyester powder

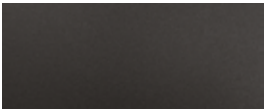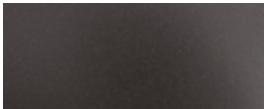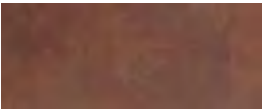
SABLÉ finishes	BRUNELLESCHI finishes	OXIPULVER finishes	WOOD and METAL GRAIN finishes	
 S100 Black Sablé	 BR-G Grey Brunelleschi	 XP10 Natural	 DMCT Cor-Ten Steel	 D3D1 Douglas 3D
 S400 Grey Sablé	 BR-M Brown Brunelleschi	 XP20 Champagne	 DRL1 White Larch	 D3F3 Ash Tree 3D-3
 S500 Green Sablé	 BR-R Red Brunelleschi	 XP30 Bronze	 DRL2 Light Larch	 D3F4 Ash Tree 3D-4
 S700 Blue Sablé	 BR-V Green Brunelleschi	 XP40 Brown	 DRL3 Medium Larch	 D3F5 Ash Tree 3D-5
	 BR-B White Brunelleschi	 XP50 Sapphire	 DRL4 Dark Larch	 DRP1 Pine Tree
		 XP60 Malachite	 DRR1 Rustic Oak	 DRN1 Walnut Tree
		 XP70 Black	 DRR2 Antique Oak	





Besides all the finishes displayed within uniform's RAL folder are available: glossy / semiglossy, matt, strutturati.



discover all the **MODELS**

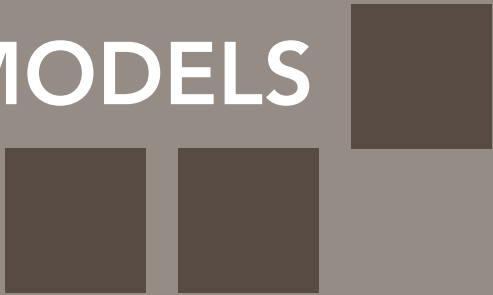

MOVEABLE SHUTTER

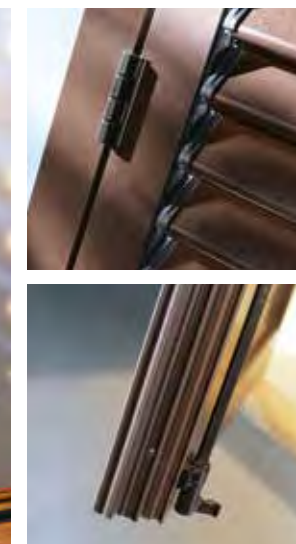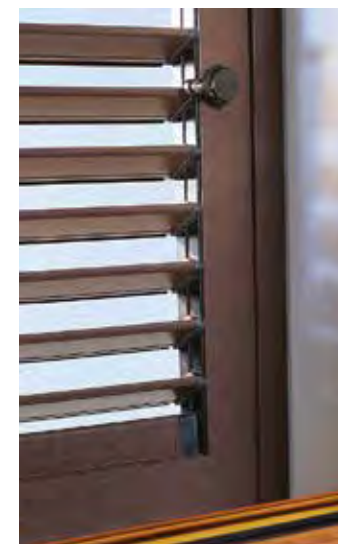

45
WELDED

31
ASSEMBLED

45 mm aluminium shutter with welded corners, 31 mm with mechanically assembled corners, and moveable lamellas measuring 55 mm. This shutter with moveable drop-shaped lamella allows to dose light and ventilation perfectly. Adjustment to the desired position is performed using a self-locking rotary knob.

SHUTTER WITH FIXED LOUVRES



45
WELDED

31
ASSEMBLED

45 mm aluminium shutter with welded corners, 31 mm with mechanically assembled corners and fixed louvre lamellas measuring 10x50 mm. Spacing distance 40 mm. The distanced fixed lamella with rounded louvre shape, allows soft lighting in the environments and efficient ventilation. This shutter is used over the entire peninsula.

HISTORIC SHUTTER



45
WELDED

45 mm aluminium shutter with welded corners and rhomboidal lamellas measuring 14x35 mm. Spacing distance 40 mm. This shutter is used in historical buildings in Central Italy; it originates from XIV century. Its imposing and noble line makes it fascinating and unchangeable through time.

BLIND WITH SLATS AND SHINGLES




[Insulated]

45
ASSEMBLED

45 mm aluminium blind, with vertical slats coupled to horizontal "shingles", total internal insulation.

This blind is typical of Venice and keeps its charm unchanged through time. It has been used in Venetian villas for over 700 years.

BLIND WITH VERTICAL SLATS

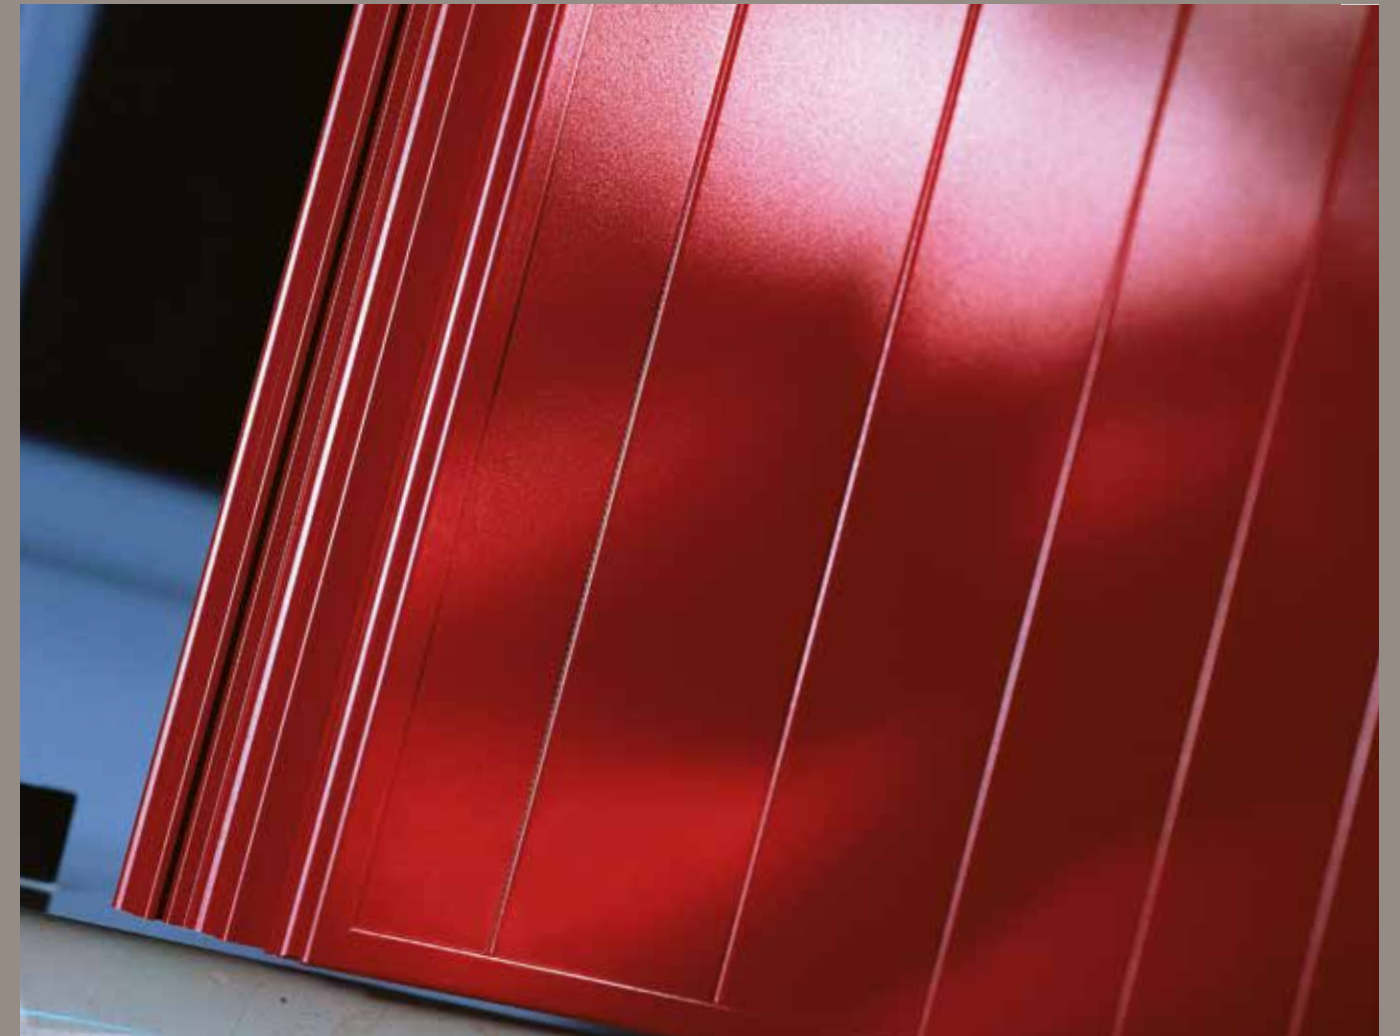

45
ASSEMBLED

45 mm aluminium blind, with vertical slats on both sides, total internal insulation. In the version with matt Ral paint, the aluminium slats assume the aspect of varnished paint. The imposing and elegant shape of this blind is particularly used throughout the Triveneto area.

BLIND WITH VERTICAL SLATS



[Insulated]

45
ASSEMBLED

45 mm aluminium blind, with vertical slats on both sides, total internal insulation. In the version in Oak the veins in the wood, enhanced by the vertical slats, assume the beauty of panels worked by a skilled carpenter. The imposing and elegant shape of this blind is particularly used throughout the Triveneto area.

RUSTIC BLIND



45
ASSEMBLED

31
ASSEMBLED

45 mm aluminium shutter and 31 mm with mechanically assembled corners and external vertical slats with central reinforcement piece in the inner part.
This blind has a strong aspect and is widely used in the Verona and Mantua areas and the entire Po Valley area in general.

INSULATED TEXTURED BLIND



45
WELDED

31
ASSEMBLED

45 mm aluminium shutter with welded corners, 31 mm with corners assembled mechanically, the sashes are enhanced by insulated textured panels. The refined and elegant appearance of this blind makes it especially suitable for period villas and palazzos.

INSULATED TEXTURED BLIND
AND MOVEABLE LAMELLAS



45
WELDED

31
ASSEMBLED

45 mm aluminium shutter with welded corners, 31 mm with mechanically assembled corners and moveable lamellas measuring 55 mm. This shutter with moveable drop-shaped lamella allows to dose light and ventilation perfectly. Adjustment to the desired position is performed using a self-locking rotary knob.

BLIND WITH 25 mm VERTICAL SLATS WITH "PADOVANA" OPENING



25
ASSEMBLED

25 mm aluminium blind with assembled corners, with internal self-load bearing ventilated slats. The width of the sashes is made up using profiles available with different sections.
In the "padovana" version, opening envisions outward sash folding.

BLIND WITH 25 mm VERTICAL SLATS WITH "VICENTINA" OPENING



25
ASSEMBLED

25 mm aluminium blind with assembled corners, internal self-load bearing ventilated slats. The width of the sashes is made up using profiles available with different sections.

The "vicentina" opening envisions internal folding of the sashes inside a niche of the external frame, so that it is hidden when in the open position.



via dell'Agricoltura, 36
37046 Minerbe - Verona, Italy
tel +39 0442 669669
uniform@uniform.it

foreign branches:

Spain and Portugal, France, England, Romania.

foreign agencies:

Germany, Austria, Poland, Croatia, Slovenia, Serbia,
Hungary, Slovakia, Czech Republic, Turkey,
Bosnia Herzegovina, Montenegro, Macedonia, Albania, Kosovo,
Greece, Cyprus, Latvia, Estonia, Azerbaijan, Middle East.



www.uniform.it