



SYSTEM EASY-FLAT70

Innovation and rigorous design,
more natural light

frame: 68x50
sash: 68x70

The Easy-Flat70 system makes it possible to reduce the sash section from 80mm to 70mm without changing the woodworking tools.

This improves production efficiency by reducing the cost of wood and increases the amount of natural light inside the home spaces.

An innovation that combines functionality and design.

SuperSoft Wood
 $U_f = 1,3 \text{ W/m}^2\text{K}$

Soft Wood
 $U_f = 1,4 \text{ W/m}^2\text{K}$

Hard Wood
 $U_f = 1,7 \text{ W/m}^2\text{K}$

U_g : $\text{W/m}^2\text{K}$

0,5 $\text{W/m}^2\text{K}$
0,6 $\text{W/m}^2\text{K}$
0,7 $\text{W/m}^2\text{K}$
0,8 $\text{W/m}^2\text{K}$
0,9 $\text{W/m}^2\text{K}$
1,0 $\text{W/m}^2\text{K}$
1,1 $\text{W/m}^2\text{K}$
1,2 $\text{W/m}^2\text{K}$
1,3 $\text{W/m}^2\text{K}$

λ : 0,110 W/mK


$U_w=0,80 \text{ W/m}^2\text{K}$
$U_w=0,90 \text{ W/m}^2\text{K}$
$U_w=0,9 \text{ W/m}^2\text{K}$
$U_w=1,0 \text{ W/m}^2\text{K}$
$U_w=1,1 \text{ W/m}^2\text{K}$
$U_w=1,2 \text{ W/m}^2\text{K}$
$U_w=1,2 \text{ W/m}^2\text{K}$
$U_w=1,3 \text{ W/m}^2\text{K}$
$U_w=1,4 \text{ W/m}^2\text{K}$

λ : 0,130 W/mK

$U_w=0,80 \text{ W/m}^2\text{K}$
$U_w=0,90 \text{ W/m}^2\text{K}$
$U_w=1,0 \text{ W/m}^2\text{K}$
$U_w=1,0 \text{ W/m}^2\text{K}$
$U_w=1,1 \text{ W/m}^2\text{K}$
$U_w=1,2 \text{ W/m}^2\text{K}$
$U_w=1,3 \text{ W/m}^2\text{K}$
$U_w=1,3 \text{ W/m}^2\text{K}$
$U_w=1,4 \text{ W/m}^2\text{K}$

λ : 0,180 W/mK

$U_w=0,90 \text{ W/m}^2\text{K}$
$U_w=1,0 \text{ W/m}^2\text{K}$
$U_w=1,0 \text{ W/m}^2\text{K}$
$U_w=1,1 \text{ W/m}^2\text{K}$
$U_w=1,2 \text{ W/m}^2\text{K}$
$U_w=1,3 \text{ W/m}^2\text{K}$
$U_w=1,3 \text{ W/m}^2\text{K}$
$U_w=1,4 \text{ W/m}^2\text{K}$
$U_w=1,5 \text{ W/m}^2\text{K}$

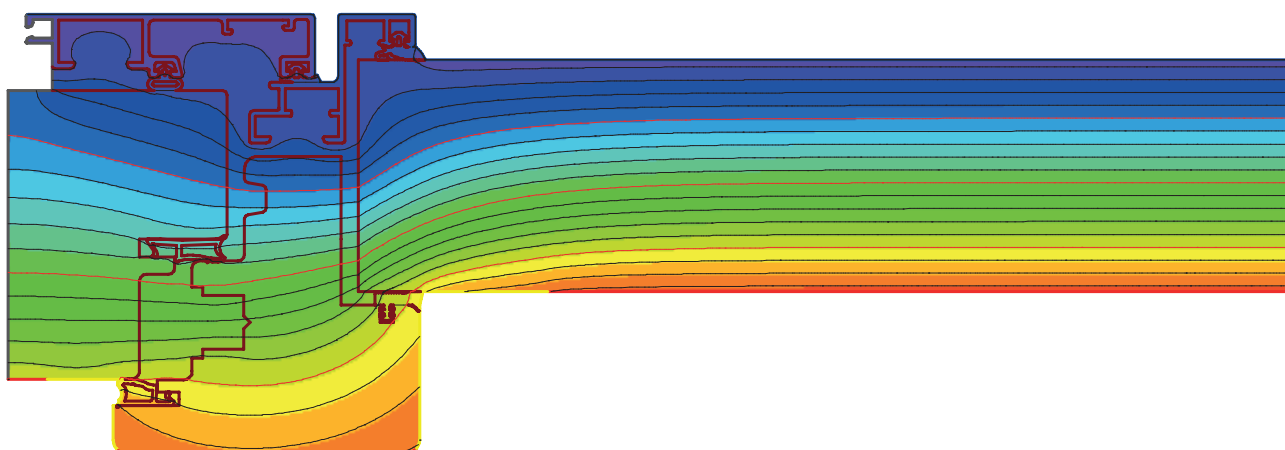

NOTES:

Sample dimensions as required by UNI EN ISO 12567/1-2002 (Window with 1 sash LxH:1230x1480mm ψ : 0,04 W/mK).

It is calculated on standard systems with reference to the sections shown in the Uniform SpA technical catalogue.

This calculation was made on the basis of the standards provided below only for the purpose of internal analysis and verification.

The results obtained do not constitute compliance criterion. Such results can be issued only by an authorized certification body.

Uniform SpA shall not be held liable for either the values indicated or their use.

Uniform SpA reserves the right to introduce modifications at any time without notice.

Reference Standards: UNI EN 10077/1-2018, UNI EN 10077/2-2018, UNI EN 10456-2008, UNI EN 673-2011.