



SYSTEM EASY-FLEX48 PLANA

Minimalist with linear design,
brightness and high competitiveness

frame: 76x45
sash: 68x48

The Easy-Flex48 Plana system, with its minimalist design, allows much more natural light into rooms, improving both aesthetics and living comfort, while maintaining a high level of competitiveness.

SuperSoft Wood
 $U_f = 1,3 \text{ W/m}^2\text{K}$

Soft Wood
 $U_f = 1,4 \text{ W/m}^2\text{K}$

Hard Wood
 $U_f = 1,8 \text{ W/m}^2\text{K}$

U_g : $\text{W/m}^2\text{K}$

0,5 $\text{W/m}^2\text{K}$
0,6 $\text{W/m}^2\text{K}$
0,7 $\text{W/m}^2\text{K}$
0,8 $\text{W/m}^2\text{K}$
0,9 $\text{W/m}^2\text{K}$
1,0 $\text{W/m}^2\text{K}$
1,1 $\text{W/m}^2\text{K}$
1,2 $\text{W/m}^2\text{K}$
1,3 $\text{W/m}^2\text{K}$
1,4 $\text{W/m}^2\text{K}$

λ : 0,110 W/mK


$U_w=0,80 \text{ W/m}^2\text{K}$
$U_w=0,90 \text{ W/m}^2\text{K}$
$U_w=0,95 \text{ W/m}^2\text{K}$
$U_w=1,0 \text{ W/m}^2\text{K}$
$U_w=1,1 \text{ W/m}^2\text{K}$
$U_w=1,2 \text{ W/m}^2\text{K}$
$U_w=1,2 \text{ W/m}^2\text{K}$
$U_w=1,2 \text{ W/m}^2\text{K}$
$U_w=1,3 \text{ W/m}^2\text{K}$
$U_w=1,4 \text{ W/m}^2\text{K}$
$U_w=1,5 \text{ W/m}^2\text{K}$

λ : 0,130 W/mK

$U_w=0,80 \text{ W/m}^2\text{K}$
$U_w=0,90 \text{ W/m}^2\text{K}$
$U_w=1,0 \text{ W/m}^2\text{K}$
$U_w=1,0 \text{ W/m}^2\text{K}$
$U_w=1,1 \text{ W/m}^2\text{K}$
$U_w=1,2 \text{ W/m}^2\text{K}$
$U_w=1,3 \text{ W/m}^2\text{K}$
$U_w=1,3 \text{ W/m}^2\text{K}$
$U_w=1,4 \text{ W/m}^2\text{K}$
$U_w=1,5 \text{ W/m}^2\text{K}$

λ : 0,180 W/mK

$U_w=0,90 \text{ W/m}^2\text{K}$
$U_w=1,0 \text{ W/m}^2\text{K}$
$U_w=1,0 \text{ W/m}^2\text{K}$
$U_w=1,1 \text{ W/m}^2\text{K}$
$U_w=1,2 \text{ W/m}^2\text{K}$
$U_w=1,2 \text{ W/m}^2\text{K}$
$U_w=1,3 \text{ W/m}^2\text{K}$
$U_w=1,4 \text{ W/m}^2\text{K}$
$U_w=1,5 \text{ W/m}^2\text{K}$
$U_w=1,5 \text{ W/m}^2\text{K}$

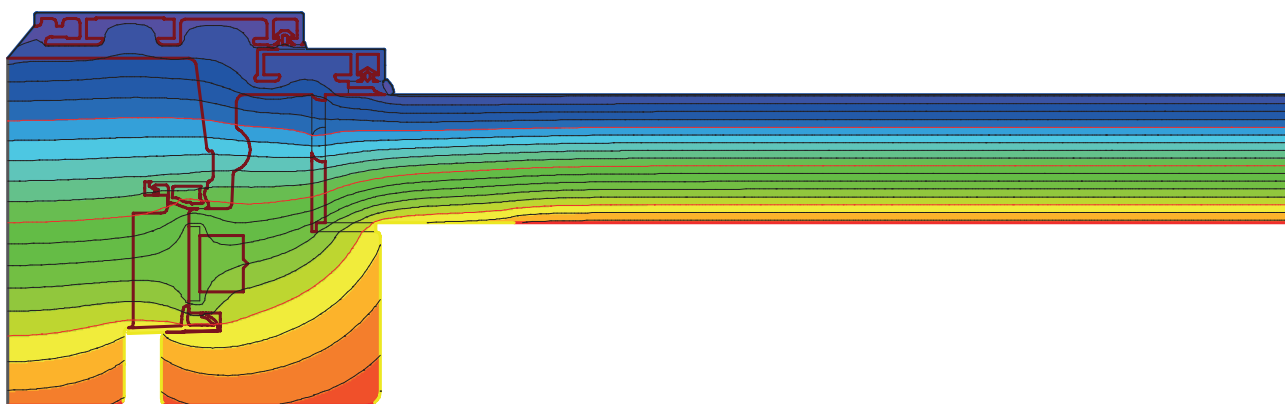

NOTES:

Sample dimensions as required by UNI EN ISO 12567/1-2002 (Window with 1 sash LxH:1230x1480mm ψ : 0,04 W/mK).

It is calculated on standard systems with reference to the sections shown in the Uniform SpA technical catalogue.

This calculation was made on the basis of the standards provided below only for the purpose of internal analysis and verification.

The results obtained do not constitute compliance criterion. Such results can be issued only by an authorized certification body.

Uniform SpA shall not be held liable for either the values indicated or their use.

Uniform SpA reserves the right to introduce modifications at any time without notice.

Reference Standards: UNI EN 10077/1-2018, UNI EN 10077/2-2018, UNI EN 10456-2008, UNI EN 673-2011.