



SYSTEM EASY-FLEX70

Essential design and optimum performance
for competitive windows and doors

frame: 58x50
sash: 68x70

The Easy-Flex70 system, thanks to the essentiality of the aluminium profiles, combines competitiveness, design and optimum performance, improving production efficiency and the aesthetics of environments.

An innovation that responds to the modern needs of the window and door manufacturing sector.

SuperSoft Wood
Uf = 1,3 W/m²K

Soft Wood
Uf = 1,4 W/m²K

Hard Wood
Uf = 1,7 W/m²K

U_g: W/m²K

0,5 W/m ² K
0,6 W/m ² K
0,7 W/m ² K
0,8 W/m ² K
0,9 W/m ² K
1,0 W/m ² K
1,1 W/m ² K
1,2 W/m ² K
1,3 W/m ² K
1,4 W/m ² K

λ: 0,110 W/mK


Uw=0,80 W/m ² K
Uw=0,90 W/m ² K
Uw=0,95 W/m ² K
Uw=1,0 W/m ² K
Uw=1,1 W/m ² K
Uw=1,2 W/m ² K
Uw=1,2 W/m ² K
Uw=1,2 W/m ² K
Uw=1,3 W/m ² K
Uw=1,4 W/m ² K
Uw=1,5 W/m ² K

λ: 0,130 W/mK

Uw=0,80 W/m ² K
Uw=0,90 W/m ² K
Uw=1,0 W/m ² K
Uw=1,0 W/m ² K
Uw=1,1 W/m ² K
Uw=1,1 W/m ² K
Uw=1,2 W/m ² K
Uw=1,2 W/m ² K
Uw=1,3 W/m ² K
Uw=1,3 W/m ² K
Uw=1,4 W/m ² K
Uw=1,5 W/m ² K

λ: 0,180 W/mK

Uw=0,90 W/m ² K
Uw=1,0 W/m ² K
Uw=1,0 W/m ² K
Uw=1,1 W/m ² K
Uw=1,2 W/m ² K
Uw=1,2 W/m ² K
Uw=1,3 W/m ² K
Uw=1,4 W/m ² K
Uw=1,5 W/m ² K
Uw=1,5 W/m ² K

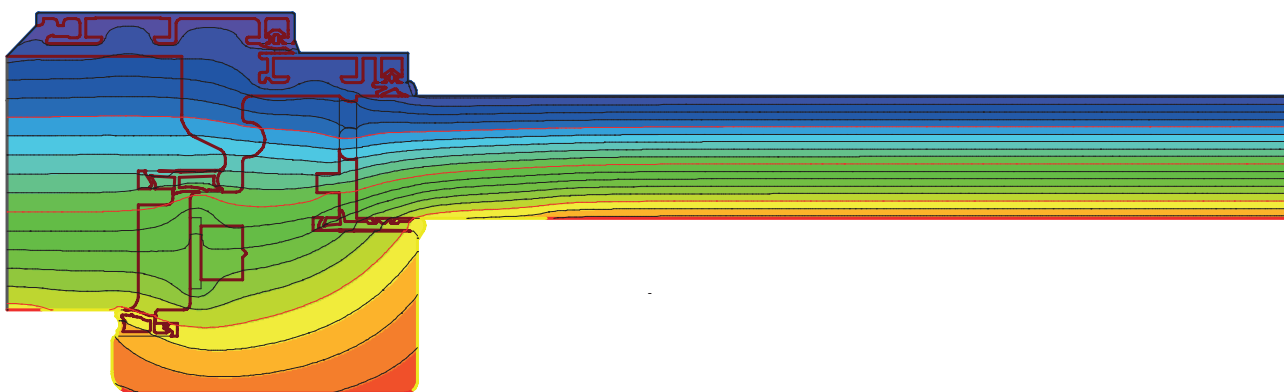

NOTES:

Sample dimensions as required by UNI EN ISO 12567/1-2002 (Window with 1 sash LxH:1230x1480mm ψ: 0,04 W/mK).

It is calculated on standard systems with reference to the sections shown in the Uniform SpA technical catalogue.

This calculation was made on the basis of the standards provided below only for the purpose of internal analysis and verification.

The results obtained do not constitute compliance criterion. Such results can be issued only by an authorized certification body.

Uniform SpA shall not be held liable for either the values indicated or their use.

Uniform SpA reserves the right to introduce modifications at any time without notice.

Reference Standards: UNI EN 10077/1-2018, UNI EN 10077/2-2018, UNI EN 10456-2008, UNI EN 673-2011.