


SYSTEM Zero

The Zero system is synonymous with minimalism. The frame is concealed into the wall ledge and provides maximum brightness inside the rooms. The design is rigorous and linear, and the sash profile is made of a special material that provides outstanding heat insulation. The Zero system is extended to an innovative sliding-uplifting window door of impressive minimalist impact.



Zero system
rigorous and minimal design

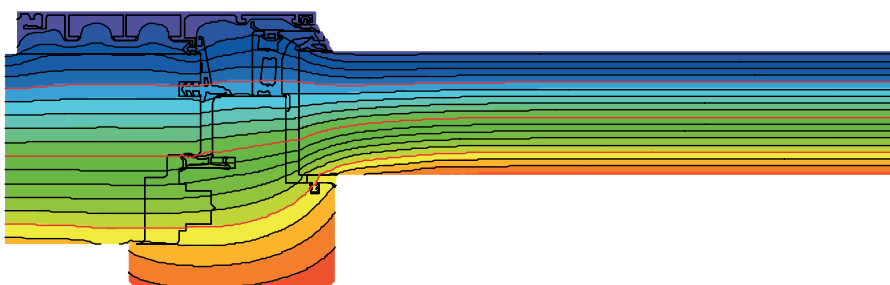

frame: 68X70
sash: 68X74

Soft Wood

$U_f = 1,2 \text{ W/(m}^2\text{K)}$

$U_f = 1,5 \text{ W/(m}^2\text{K)}$

U_f	U_g	$\psi_g \text{ 0,04}$	$\psi_g \text{ 0,06}$
1,2 W/(m ² K)	0,6	$U_w=0,9 \text{ W/(m}^2\text{K)}$	$U_w=0,9 \text{ W/(m}^2\text{K)}$
1,2 W/(m ² K)	0,7	$U_w=1,0 \text{ W/(m}^2\text{K)}$	$U_w=1,0 \text{ W/(m}^2\text{K)}$
1,2 W/(m ² K)	0,8	$U_w=1,0 \text{ W/(m}^2\text{K)}$	$U_w=1,1 \text{ W/(m}^2\text{K)}$
1,2 W/(m ² K)	0,9	$U_w=1,1 \text{ W/(m}^2\text{K)}$	$U_w=1,1 \text{ W/(m}^2\text{K)}$
1,2 W/(m ² K)	1	$U_w=1,2 \text{ W/(m}^2\text{K)}$	$U_w=1,2 \text{ W/(m}^2\text{K)}$
1,2 W/(m ² K)	1,1	$U_w=1,2 \text{ W/(m}^2\text{K)}$	$U_w=1,3 \text{ W/(m}^2\text{K)}$
1,2 W/(m ² K)	1,2	$U_w=1,3 \text{ W/(m}^2\text{K)}$	$U_w=1,3 \text{ W/(m}^2\text{K)}$
1,2 W/(m ² K)	1,3	$U_w=1,4 \text{ W/(m}^2\text{K)}$	$U_w=1,4 \text{ W/(m}^2\text{K)}$
1,2 W/(m ² K)	1,4	$U_w=1,4 \text{ W/(m}^2\text{K)}$	$U_w=1,5 \text{ W/(m}^2\text{K)}$
1,2 W/(m ² K)	1,5	$U_w=1,5 \text{ W/(m}^2\text{K)}$	$U_w=1,6 \text{ W/(m}^2\text{K)}$
1,2 W/(m ² K)	1,6	$U_w=1,6 \text{ W/(m}^2\text{K)}$	$U_w=1,6 \text{ W/(m}^2\text{K)}$
1,2 W/(m ² K)	1,7	$U_w=1,6 \text{ W/(m}^2\text{K)}$	$U_w=1,7 \text{ W/(m}^2\text{K)}$
1,2 W/(m ² K)	1,8	$U_w=1,7 \text{ W/(m}^2\text{K)}$	$U_w=1,8 \text{ W/(m}^2\text{K)}$

U_f	U_g	$\psi_g \text{ 0,04}$	$\psi_g \text{ 0,06}$
1,5 W/(m ² K)	0,6	$U_w=1,0 \text{ W/(m}^2\text{K)}$	$U_w=1,0 \text{ W/(m}^2\text{K)}$
1,5 W/(m ² K)	0,7	$U_w=1,0 \text{ W/(m}^2\text{K)}$	$U_w=1,1 \text{ W/(m}^2\text{K)}$
1,5 W/(m ² K)	0,8	$U_w=1,1 \text{ W/(m}^2\text{K)}$	$U_w=1,2 \text{ W/(m}^2\text{K)}$
1,5 W/(m ² K)	0,9	$U_w=1,2 \text{ W/(m}^2\text{K)}$	$U_w=1,2 \text{ W/(m}^2\text{K)}$
1,5 W/(m ² K)	1	$U_w=1,3 \text{ W/(m}^2\text{K)}$	$U_w=1,3 \text{ W/(m}^2\text{K)}$
1,5 W/(m ² K)	1,1	$U_w=1,3 \text{ W/(m}^2\text{K)}$	$U_w=1,4 \text{ W/(m}^2\text{K)}$
1,5 W/(m ² K)	1,2	$U_w=1,4 \text{ W/(m}^2\text{K)}$	$U_w=1,4 \text{ W/(m}^2\text{K)}$
1,5 W/(m ² K)	1,3	$U_w=1,5 \text{ W/(m}^2\text{K)}$	$U_w=1,5 \text{ W/(m}^2\text{K)}$
1,5 W/(m ² K)	1,4	$U_w=1,5 \text{ W/(m}^2\text{K)}$	$U_w=1,6 \text{ W/(m}^2\text{K)}$
1,5 W/(m ² K)	1,5	$U_w=1,6 \text{ W/(m}^2\text{K)}$	$U_w=1,6 \text{ W/(m}^2\text{K)}$
1,5 W/(m ² K)	1,6	$U_w=1,7 \text{ W/(m}^2\text{K)}$	$U_w=1,7 \text{ W/(m}^2\text{K)}$
1,5 W/(m ² K)	1,7	$U_w=1,7 \text{ W/(m}^2\text{K)}$	$U_w=1,8 \text{ W/(m}^2\text{K)}$
1,5 W/(m ² K)	1,8	$U_w=1,8 \text{ W/(m}^2\text{K)}$	$U_w=1,9 \text{ W/(m}^2\text{K)}$